


MODEL	P-80F-E
-------	---------

No.	Name of article	Filter model	Material	Efficiency	Color
01	Replacement Filter	ML-310RFN	PET Acrylics synthetic fiber	Coarse 60%(ISO16890:2016)	White

■ Outline drawings

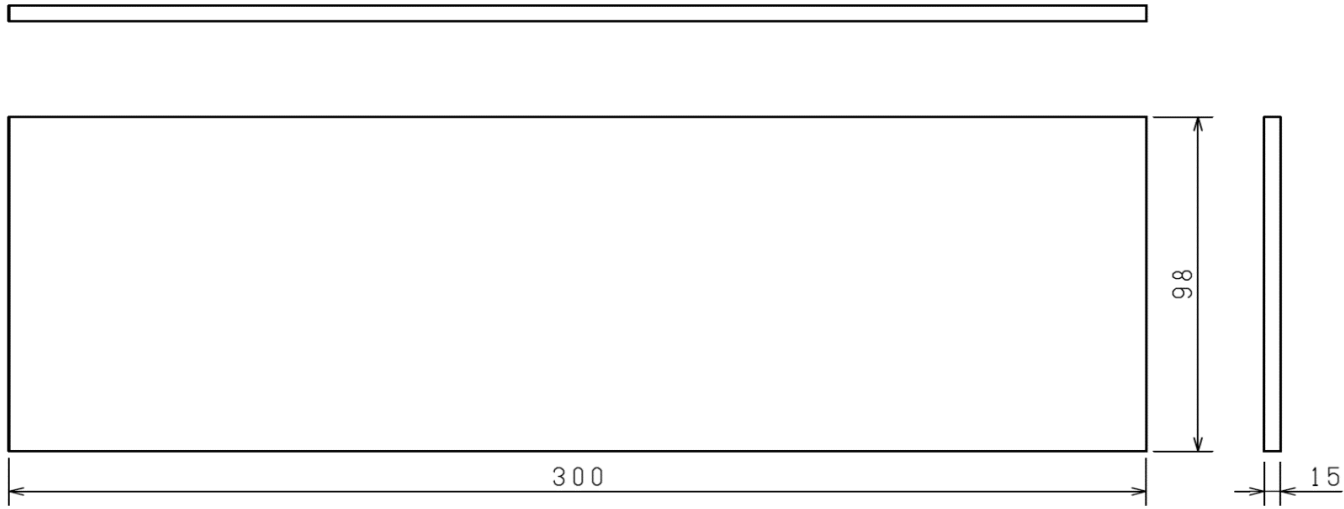

	UNIT	SCALE
	mm	N.T.S

Model	Number of filter per set	Applicable model
P-80F-E	1	VL-80U <sub>5</sub> -E VL-80EU <sub>5</sub> -E

■ Instructions for installation


Use the existing filter frame and exchange only the inner air filter during replacement.

■ Attention about use

This filter is required to clean on a regular basis.

- Cleaning: At least once every six months.
- Replacement time: After the filter is damaged or washed with water about four times.
- \*The cleaning and replacement time differs depending on the operating environment.

■ Pressure loss characteristic

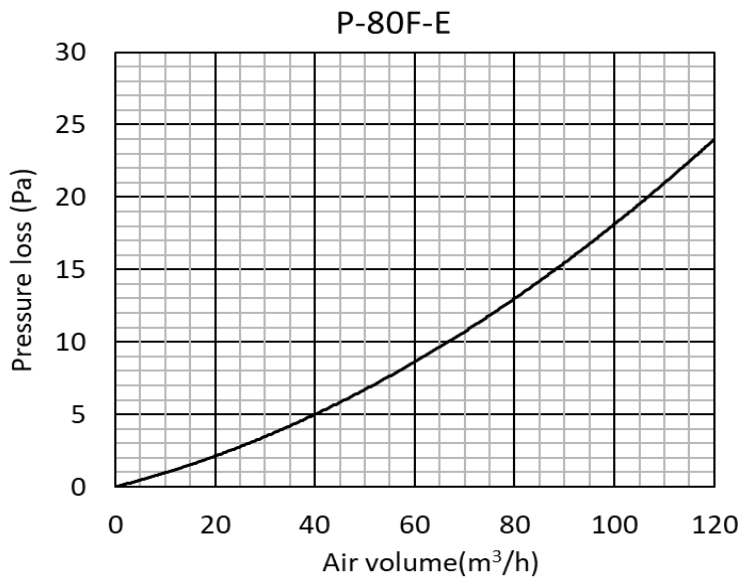

	SPECIFICATIONS		※Specification may be subject to change without notice.	
	DATE	TYPE	Replacement Filter	
	03-Jul-2024	MODEL	P-80F-E	
	NUMBER	N23SGGD0005	1/1	